


Emerald Mini Spike Light, Textured Black, 3000K

ESPI0003.TB30.M

Availability: **Standard** (This item is generally stocked, please check with your Unios distributor)

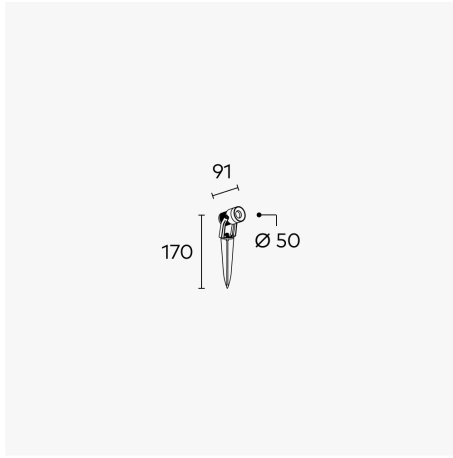

Downloads

- [BIM Object - Sketchup](#)
- [BIM Object - Revit](#)
- [IES File](#)
- [Installation Instructions](#)

Key Product Info

- 3W (1mA)
- 3000K (275lm)
- Textured Black
- 38°

Driver

Name	24V Driver Required
Driver Location	Remote
Control Type	Non-dim
Current output maximum	1mA

Design Specifications

Material	Powder Coated Aluminium
Height	264mm
Length	80mm
Diameter	ø50mm
Tilt	360°
Weight	375g
Family Name	Emerald Spike Spotlight



Performance Specifications

Lumens	275lm
IP Rating	IP65
CRI	80
Efficacy	Up to 91.67lm/W
Lifetime	>55,000h L80B10
LED Type	COB
SDCM	≤3
COI Compliance	N/A
Warranty	3 Years

Installation Specifications

Remote Mount	Yes
Class Rating	Class III

Photometrics

