

# Anchor


## SUBMERSIBLE SPOTLIGHT

 <b>Class III</b> 24V DC	<b>Power</b> 7 Watts	<b>IP Rating</b> 68	<b>Material</b> Stainless Steel 316 Marine Grade	<b>Warranty</b> 3 Years				
---	-------------------------	------------------------	---	----------------------------	---	---	---	---


**ⓘ CAUTION** – Must Be Installed By A Licensed Electrician

Please read instruction manual on **both** sides carefully before installing luminaire.

- Please read instructions for installation of luminaire provided below. Safety of this luminaire and warranty will be voided unless followed.
- Installation and operation of this luminaire must be within accordance with national safety regulations. Unios™ does not warrant any liability when damage is caused by misuse or improper installation.
- This luminaire is void of warranty if any part has been modified. Please visit [unios.com/warranty](http://unios.com/warranty) for more information.
- Over-voltage protection units should be installed to prevent electronic control gear from failing due to electrical spikes, e.g. from switching of inductive loads.

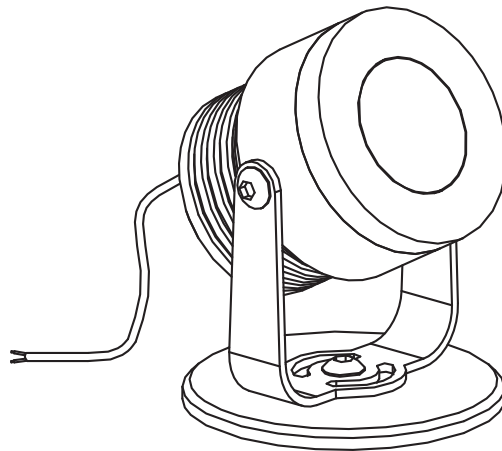

## Mounting Plate

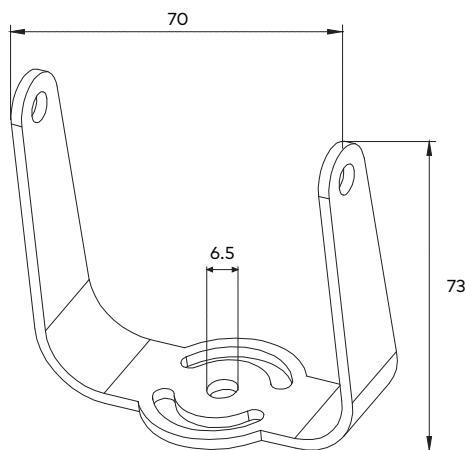

## Installation Instructions

- 1** Must be installed by a licensed electrician.
- 2** Before installing, make sure the power supply is switched off.
- 3** The anchor pond light is provided with 5m of cable. If submerging the luminaire, it is highly recommended for the cable connection to be situated away from the body of water.
  1. For installation using the weighted base plate;
    - A. Place luminaire in desired location and angle.
    - B. Connect luminaire to remote electronic control gear.
    - C. Ensure any connections between electronic control gear and luminaire are of a suitable IP rating for the location of the connection.
  2. For mounting the luminaire;
    - A. Mark up bracket location.
    - B. Fix bracket to surface.
    - C. Connect luminaire to remote electronic control gear.
    - D. Ensure any connections between electronic control gear and luminaire are of a suitable IP rating for the location of the connection.
    - E. Adjust luminaire to desired angle.



## Accessories (Included)



Honeycomb Lens



1x Allen Key



2x Heatshrink Solder Joiners

## Wiring

This luminaire must be used in conjunction with a remote 24V Constant Voltage electronic control gear. Multiple luminaires must be wired in parallel.



## Dimming

Must be used with a dimmable driver. Please refer to driver instructions for pairing of suitable dimming system.

## Cleaning

Before cleaning, disconnect from mains supply and allow luminaire to cool.

Regular cleaning of the luminaire is **strongly recommended**. In harsher conditions, it is recommended that a strict cleaning schedule is in place to ensure no eroding chemicals are left on the surface for long periods. To clean luminaire, only use a damp, microfibre cloth. A dilute solution of a mild pH-neutral liquid detergent can be used for resistant dirt (Solvents must not be used). Please note surface of luminaire must be wiped down with a clean damp microfibre cloth to ensure no residue is left on the surface. Take care not to damage the surface of the luminaire. Do not use high pressure cleaners.

## Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire will cause corrosion of the surface of the luminaire and will void the warranty.

## Cleaning of Luminaire Lens

The luminaire lens or glass can be cleaned with glass specific cleaning agents that are ph-neutral, alcohol-free and non-abrasive. Always use a damp microfibre cloth and take care not to damage any seals surrounding the glass.



Class III

Luminaire in which protection against electric shock is provided by the use of Extra Low Voltage.



IP68

Dust-tight and protection from immersion of up to 5m.



24V DC

24V DC Supply.



Outdoor Use

This luminaire is suitable for outdoor use, taking in consideration of the IP rating.

