
Athena G2 Surface Mounted Downlight, Textured White, 4000K

ATSM0018.TW40.M

Availability: Standard (This item is generally stocked, please check with your Unios distributor)



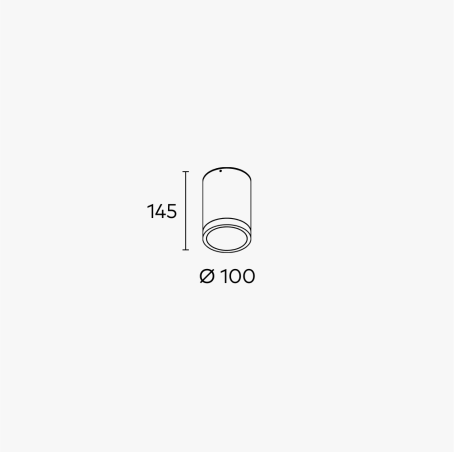

Downloads

- BIM Object - Sketchup
- BIM Object - Revit
- Installation Instructions

Key Product Info

- 18W (500mA)
- 4000K (2101lm)
- Textured White
- 36°


Driver

Name	Unios G2 500mA Flicker-Free Phase-Cut Driver
Product Code	FP050002
Driver Location	Built-In
Control Type	Phase-cut dimmable
Measurements (LxWxH)	55x55x25mm
Current output maximum	500mA


Performance Specifications

Lumens	2101lm
IK Rating	IK10
IP Rating	IP66
CRI	92
Efficacy	Up to 116.72lm/W
Lifetime	>55,000h L90B10
LED Type	COB
SDCM	≤2
COI Compliance	N/A
Warranty	5 Years

Photometrics



Cone Diagram



Design Specifications

Material	Powder Coated Aluminium
Height	145mm
Diameter	ø100mm
Weight	1400g
Family Name	Athena G2 Series

Installation Specifications

Remote Mount	No
Class Rating	Class I

Notes

Upward Waste Light Ratio: 0%

sales@unios.com / unios.com

Exported: 04.11.26 / Product design and technical data may be subject to change.

© Unios Pty Ltd 2021

Configure online