




Athena G2 Surface Mounted Downlight, Textured White, 4000K

ATSM0018.TW40.M

Availability: **Standard** (This item is generally stocked, please check with your Unios distributor)

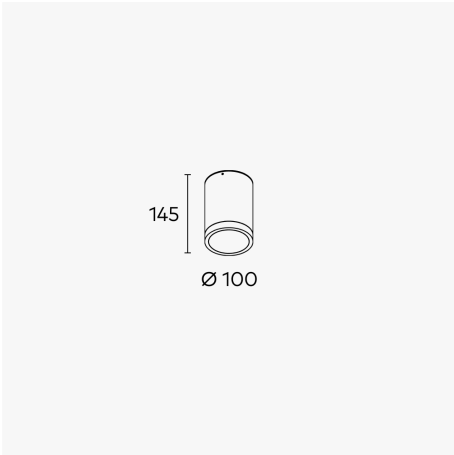

Downloads

- [BIM Object - Sketchup](#)
- [BIM Object - Revit](#)
- [Installation Instructions](#)

Key Product Info

- 18W (500mA)
- 4000K (2101lm)
- Textured White
- 36°

Driver

Name	Unios G2 500mA Flicker-Free Phase-Cut Driver
Product Code	FP050002
Driver Location	Built-In
Control Type	Phase-cut dimmable
Measurements (LxWxH)	55x55x25mm
Current output maximum	500mA

Design Specifications

Material	Powder Coated Aluminium
Height	145mm
Diameter	ø100mm
Weight	1400g
Family Name	Athena G2 Series

Performance Specifications

Lumens	2101lm
IK Rating	IK10
IP Rating	IP66
CRI	92
Efficacy	Up to 116.72lm/W
Lifetime	>55,000h L90B10
LED Type	COB
SDCM	≤2
COI Compliance	N/A
Warranty	5 Years


Installation Specifications

Remote Mount	No
Class Rating	Class I


Notes

Upward Waste Light Ratio: 0%

Photometrics



Cone Diagram



sales@unios.com / unios.com

Exported: 25.08.26 / Product design and technical data may be subject to change.
© Unios Pty Ltd 2021

[Configure online](#)