
Axis Medium Surface Mounted Downlight, Textured White, 3000K

AS970015.TW30.W

Availability: Standard (This item is generally stocked, please check with your Unios distributor)



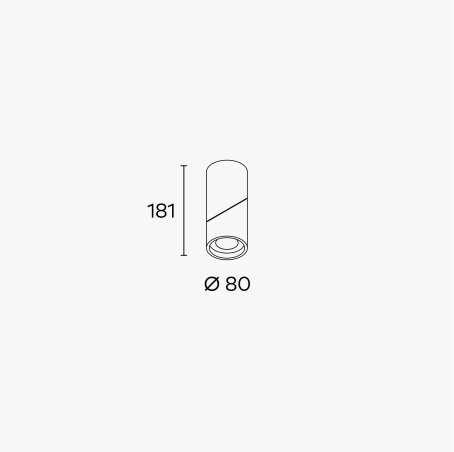

Downloads

- BIM Object - Sketchup
- BIM Object - Revit
- IES File
- Installation Instructions

Key Product Info

- 15W (400mA)
- 3000K (1144lm)
- Textured White
- 60°

Driver

Name	Unios 400mA Phase-Cut Driver
Product Code	PC040002
Driver Location	Built-In
Control Type	Phase-cut dimmable
Current output maximum	400mA

Design Specifications

Material	Powder Coated Aluminium
Height	184mm
Diameter	ø80mm
Tilt	90°
Weight	1900g
Family Name	Axis Surface Mounted Downlight


Performance Specifications

Lumens	1144lm
IP Rating	IP65
CRI	97+ (R9: >90)
Efficacy	Up to 76.27lm/W
UGR	<16
Lifetime	>55,000h L90B10
LED Type	COB
SDCM	≤1.5
COI Compliance	N/A
Warranty	5 Years

Installation Specifications

Remote Mount	No
Class Rating	Class I

Photometrics



sales@unios.com / unios.com

Exported: 04.11.26 / Product design and technical data may be subject to change.
© Unios Pty Ltd 2021

Configure online