


# Axis Small Surface Mounted Downlight, Textured Black, 3000K

AS970007.TB30.W

Availability: **Standard** (This item is generally stocked, please check with your Unios distributor)

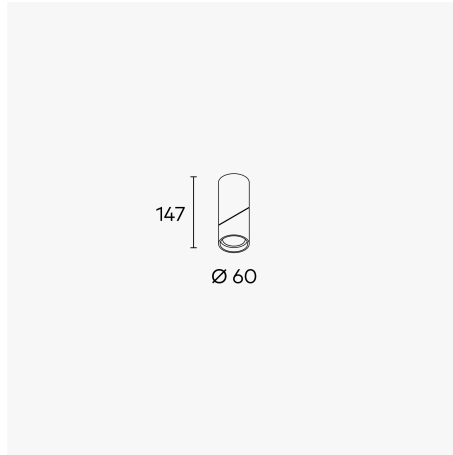

## Downloads

- [BIM Object - Sketchup](#)
- [BIM Object - Revit](#)
- [IES File](#)
- [Installation Instructions](#)

## Key Product Info

- 7W (200mA)
- 3000K (534lm)
- Textured Black
- 60°

## Driver

Name	Unios 200mA Phase-Cut Driver
Product Code	PC020004
Driver Location	Built-In
Control Type	Phase-cut dimmable
Current output maximum	200mA

## Design Specifications

Material	Powder Coated Aluminium
Height	147mm
Diameter	Ø60mm
Tilt	90°
Weight	860g
Family Name	Axis Surface Mounted Downlight

## Performance Specifications

Lumens	534lm
IP Rating	IP65
CRI	97+ (R9: >90)
Efficacy	Up to 76.29lm/W
UGR	<16
Lifetime	>55,000h L90B10
LED Type	COB
SDCM	≤1.5
COI Compliance	N/A
Warranty	5 Years

## Installation Specifications

Remote Mount	No
Class Rating	Class I

## Photometrics

