
Axis Small Surface Mounted Downlight, Textured Black, 3000K

AS970007.TB30.W

Availability: Standard (This item is generally stocked, please check with your Unios distributor)



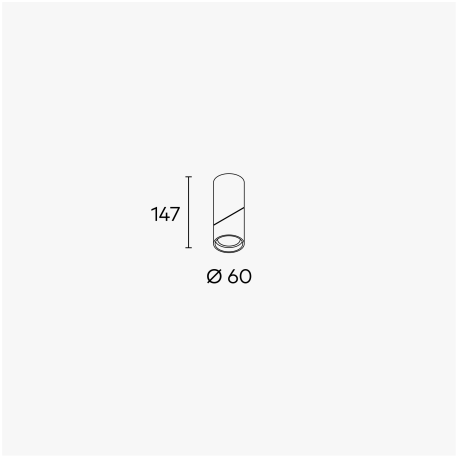

Downloads

- BIM Object - Sketchup
- BIM Object - Revit
- IES File
- Installation Instructions

Key Product Info

- 7W (200mA)
- 3000K (534lm)
- Textured Black
- 60°

Driver

Name	Unios 200mA Phase-Cut Driver
Product Code	PC020004
Driver Location	Built-In
Control Type	Phase-cut dimmable
Current output maximum	200mA

Design Specifications

Material	Powder Coated Aluminium
Height	147mm
Diameter	ø60mm
Tilt	90°
Weight	860g
Family Name	Axis Surface Mounted Down-light


Performance Specifications

Lumens	534lm
IP Rating	IP65
CRI	97+ (R9: >90)
Efficacy	Up to 76.29lm/W
UGR	<16
Lifetime	>55,000h L90B10
LED Type	COB
SDCM	≤1.5
COI Compliance	N/A
Warranty	5 Years

Installation Specifications

Remote Mount	No
Class Rating	Class I

Photometrics



sales@unios.com / unios.com

Exported: 23.11.26 / Product design and technical data may be subject to change.
© Unios Pty Ltd 2021

Configure online