
# Axis Small Surface Mounted Downlight, Textured Black, 4000K

AS970007.TB40.W

Availability: Standard (This item is generally stocked, please check with your Unios distributor)



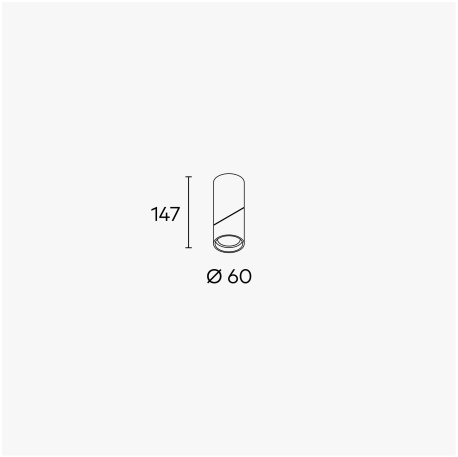


## Downloads

- BIM Object - Sketchup
- BIM Object - Revit
- IES File
- Installation Instructions

## Key Product Info

- 7W (200mA)
- 4000K (548lm)
- Textured Black
- 60°

## Driver

| | |
|---|---|
| Name | Unios 200mA Phase-Cut Driver |
| Product Code | PC020004 |
| Driver Location | Built-In |
| Control Type | Phase-cut dimmable |
| Current output maximum | 200mA |

## Design Specifications

| | |
|---|---|
| Material | Powder Coated Aluminium |
| Height | 147mm |
| Diameter | ø60mm |
| Tilt | 90° |
| Weight | 860g |
| Family Name | Axis Surface Mounted Down-light |


## Performance Specifications

| | |
|---|---|
| Lumens | 548lm |
| IP Rating | IP65 |
| CRI | 97+ (R9: >90) |
| Efficacy | Up to 78.29lm/W |
| UGR | <16 |
| Lifetime | >55,000h L90B10 |
| LED Type | COB |
| SDCM | ≤1.5 |
| COI Compliance | Compatible |
| Warranty | 5 Years |

## Installation Specifications

| | |
|---|---|
| Remote Mount | No |
| Class Rating | Class I |

## Photometrics




sales@unios.com / unios.com

Exported: 04.11.26 / Product design and technical data may be subject to change.
© Unios Pty Ltd 2021

Configure online