
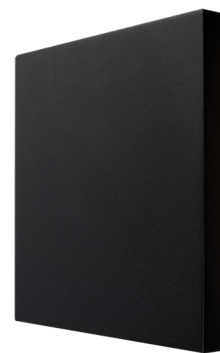


Paragon

WALL LIGHT


The square as a shape is ubiquitous in our everyday lives. Its simplicity and omnipresence blends effortlessly into built environments. The Paragon Wall Light is minimalism taken to its full extent – a simple square form paired with soft indirect back lighting. The effect is of a semi floating square of light – its effortless simplicity represents the functional minimalism we strive for.

- A minimalist square design that emits a soft glow of backlighting
- Utilise the Paragon Wall Light in applications requiring a minimal shape that blends into any design application, such as passage ways and living spaces
- Designed to be as compact as possible with a depth of 40mm



Above: Soft indirect illumination
Top Right: Residential application
Right: Dot-free illumination

Measurements (mm)




Absolute Luminous Flux

15W (400mA)
360lm (at 3000K)

Beam

30° (W)

Photometrics



α = 30°



Finishes

UV Textured Black

UV Textured White

General Specifications

Material | Powder Coated Aluminium

IP | 65

Warranty | 3 Years

LED

Colour Temp | 3000K

CRI | 80+

Efficacy | Up to 21lm/w

Colour Deviation | SDCM≤3

Lifetime | 59,000h L70

Driver

Power Factor | >0.90

240V Built-in PC Dimmable Driver


DALI Driver must be remote.

Dimming | LED Phase-Cut Dim (PC)

DALI Dim Optional

A	PARA	B	0015	C	TB	D	30	E	W	F	-	Driver (DALI drivers can be configured via Product Toolbox)
A	PARA	B	0015	C	TW	D	30	E	W	F	-	Phase Cut Dimmable Driver included

Example: **PARA0015.TB30.W**
Refer to data sheet for available configurations.
Visit Product Toolbox at unios.com/paragon to configure compatible Osram/Tridonic DALI drivers.



WALL SURFACE