



Above: Retail application
Left: Adjustable gimbal (up to 30° of tilt)


Parallax

ADJUSTABLE DOWNLIGHT

A great range of adjustability and excellent colour rendering makes the Parallax Adjustable Downlight suited to a wide range of retail, hospitality and public applications — giving true flexibility in showcasing products and objects in their best light.

- Tiltable up to 30° and rotatable up to 350° for both spotlighting and general lighting
- Ideal for commercial applications such as showrooms, offices, restaurants and hotels
- Available in 2700K – 6000K colour temperatures

Measurements (mm)




Absolute Luminous Flux

	3000K	4000K
28W (700mA)	2435lm	2595lm
40W (900mA)	3085lm	3310lm

Beam

20° (P) 30° (N) 45° (M)
55° (W) 65° (F)

Photometrics

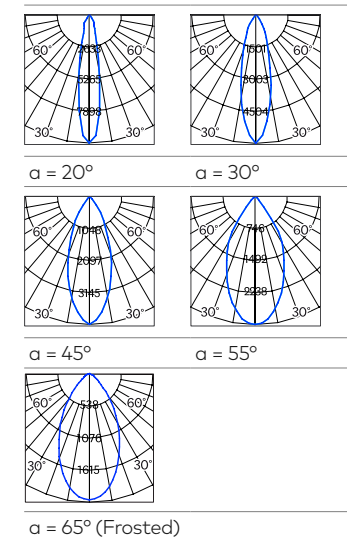

Finishes

UV Textured Black	
UV Textured White	

General Specifications

Material Powder Coated Aluminium
IP 20
UGR (Unified Glare Rating) <19
Warranty 5 Years

LED

Colour Temp 2700K, 3000K, 4000K, 5000K, 6000K
CRI 92+
Efficacy Up to 90lm/w
Colour Deviation SDCM≤3
Lifetime >100,000h L70

Driver

Power Factor >0.90
240V Remote PC Dimmable Driver
Dimming LED Phase-Cut Dim (PC) DALI Dim Optional

Accessory

FLO09
Frosted Lens (65°)



A	PADJ	B	0151	Size	151mm	C	Finish TB Textured Black TW Textured White	D	CCT 27 2700K 30 3000K 40 4000K 50 5000K 60 6000K	E	Beam P Pencil N Narrow M Medium W Wide F Flood	F	Driver (DALI drivers can be configured via Product Toolbox) 700mA 25-42VDC IP20 Phase Cut 900mA 21-42VDC IP20 Phase Cut PC070002 PC090001
Product Family	Parallax Adjustable Downlight		Product Family	PADJ		Example:	PADJ0151.TB30.M-PC070002		Refer to data sheet for available configurations. Visit Product Toolbox at unios.com/parallaxadjustable to configure compatible Osram/Tridonic DALI drivers.				