


Cuadro Small Wall Light

CUAD0002.TG30.F

Absolute Luminous Flux 2W (24VDC) / 60lm Beam 90° (F)

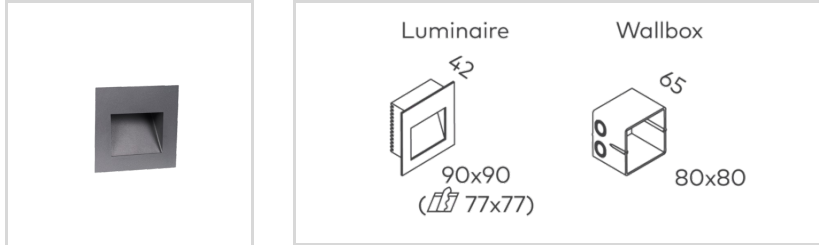

LxW	90x90mm
Cutout	77x77mm
Wallbox Cutout	80x80mm
Height	32mm
Finish	Textured Grey
Colour Temp	3000K
Class	Class III
Beam Angle	90° (F)
Material	Powder Coated Aluminium, PVC Wallbox
IP Rating	IP65
Wiring	Wired in Parallel
Warranty	3 Years
CRI	80+ (R9: >0)
Efficacy	Up to 27lm/W
Colour Deviation	SDCM ≤ 3
Lifetime	>54,000h L70B10

Electronic Control Gear

24VDC Control Gear Required
24VDCREQUIRED

Dimensions: Var.

Downloads

General Specifications	
Product Images	
IES Files	
Installation Instructions	
Revit Family	
Sketchup Objects	
ArchicAD Library	

Features

- The Cuadro Wall Light is defined by a minimalist architectural design and a wide light distribution
- Designed with frosted lens to create a wide beam angle ideal for indicator or step lighting
- Suitable for indicator/step lighting applications
- Complete with tension wing clips (suitable with or without wallbox installations)

Light Distribution



Luminaire Notes

24VDC Control gear required. Go to 24V DC control gear product to specify.
For other Casambi Bluetooth options, please refer to unios.com/smartcontrols
For any custom requests, please specify in the notes section.

Ordering Code

Stocked Configuration (subject to availability)

CUAD	0002	TG	30	F	-			-	
PRODUCT	POWER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES			CONTROL GEAR

Contact Information

Name _____ Email _____
Company _____ Phone _____



[VIEW PRODUCT ONLINE](#)