


## Cuadro Small Wall Light

CUAD0002.TG40.F

Absolute Luminous Flux 2W (24VDC) / 60lm Beam 90° (F)

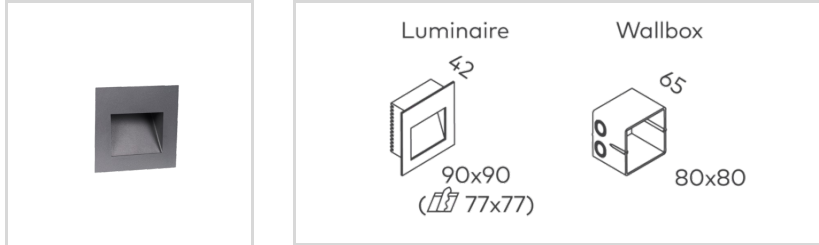

LxW	90x90mm
Cutout	77x77mm
Wallbox Cutout	80x80mm
Height	32mm
Finish	Textured Grey
Colour Temp	4000K
Class	Class III
Beam Angle	90° (F)
Material	Powder Coated Aluminium, PVC Wallbox
IP Rating	IP65
Wiring	Wired in Parallel
Warranty	3 Years
CRI	80+ (R9: >0)
Efficacy	Up to 27lm/W
Colour Deviation	SDCM ≤ 3
Lifetime	>54,000h L70B10

### Electronic Control Gear

24VDC Control Gear Required  
24VDCREQUIRED

Dimensions: Var.

### Downloads

General Specifications	
Product Images	
IES Files	
Installation Instructions	
Revit Family	
Sketchup Objects	
ArchicAD Library	

### Features

- The Cuadro Wall Light is defined by a minimalist architectural design and a wide light distribution
- Designed with frosted lens to create a wide beam angle ideal for indicator or step lighting
- Suitable for indicator/step lighting applications
- Complete with tension wing clips (suitable with or without wallbox installations)

### Light Distribution



### Luminaire Notes

24VDC Control gear required. Go to 24V DC control gear product to specify.  
For other Casambi Bluetooth options, please refer to unios.com/smartcontrols  
For any custom requests, please specify in the notes section.

### Ordering Code

Stocked Configuration (subject to availability)

CUAD	0002	TG	40	F	-			-	
PRODUCT	POWER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES			CONTROL GEAR

### Contact Information

Name \_\_\_\_\_ Email \_\_\_\_\_  
Company \_\_\_\_\_ Phone \_\_\_\_\_



[VIEW PRODUCT ONLINE](#)