


Evio One Direction Bollard

EVIO0607.TB30.M

Absolute Luminous Flux 7W (200mA) / 460lm Beam 40° (M)

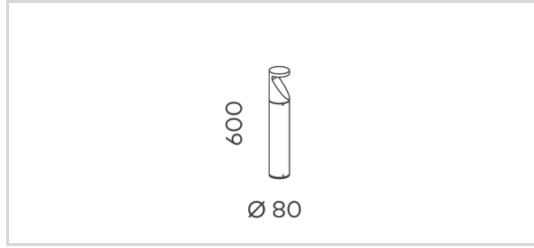

Diameter	Ø80mm
Height	600mm
Finish	UV Textured Black
Colour Temp	3000K
Class	Class I
Beam Angle	40° (M)
Material	Powder Coated Aluminium
IP Rating	IP65
IK Rating	IK10
Warranty	3 Years
CRI	80+
Efficacy	Up to 59lm/W
Colour Deviation	SDCM≤3
Lifetime	>55,000h L80B10

Electronic Control Gear

Built-in UNIOS Non-Dim Driver STD-ICC

Dimensions: Var.

Downloads

General Specifications	
Product Images	
IES Files	
Installation Instructions	
Revit Family	
Sketchup Objects	
ArchicAD Library	

Features

- A combination of round and angular lines, the construction serves both a functional and design purpose
- The wide angled opening creates an inviting spread of light for pathways
- Designed to emit a defined arc of light for pathways

Light Distribution



Luminaire Notes

For other Casambi Bluetooth options, please refer to unios.com/smartcontrols
For any custom requests, please specify in the notes section.

Ordering Code

Stocked Configuration (subject to availability) ●

EVIO	0607	TB	30	M	-				-	
PRODUCT	SIZE/POWER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES				CONTROL GEAR

Contact Information

Name _____ Email _____
Company _____ Phone _____



[VIEW PRODUCT ONLINE](#)