


## Evio Two Direction Bollard

EVIT0607.TB30.M

Absolute Luminous Flux 7W (200mA) / 505lm Beam 30° (M)

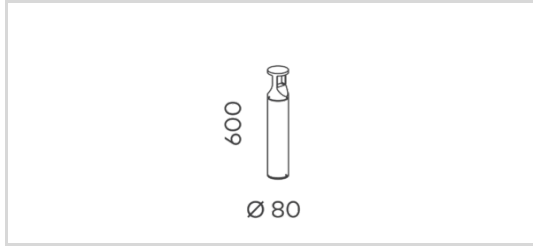

Diameter	Ø80mm
Height	600mm
Finish	UV Textured Black
Colour Temp	3000K
Class	Class I
Beam Angle	30° (M)
Material	Powder Coated Aluminium
IP Rating	IP65
IK Rating	IK10
Warranty	3 Years
CRI	80+
Efficacy	Up to 59lm/W
Colour Deviation	SDCM≤3
Lifetime	>55,000h L80B10

### Electronic Control Gear

Built-in UNIOS Non-Dim Driver STD-ICC

Dimensions: Var.

### Downloads

- General Specifications
- Product Images
- IES Files
- Installation Instructions
- Revit Family
- Sketchup Objects
- ArchicAD Library

### Features

- A combination of round and angular lines, the construction serves both a functional and design purpose
- The wide angled opening creates an inviting spread of light for pathways
- Designed to emit a defined arc of light for pathways

### Light Distribution



### Luminaire Notes

For other Casambi Bluetooth options, please refer to [unios.com/smartcontrols](https://unios.com/smartcontrols)  
For any custom requests, please specify in the notes section.

### Ordering Code

Stocked Configuration (subject to availability) ●

EVIT	0607	TB	30	M	-				-	
PRODUCT	SIZE/POWER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES				CONTROL GEAR

### Contact Information

Name \_\_\_\_\_ Email \_\_\_\_\_  
Company \_\_\_\_\_ Phone \_\_\_\_\_



[VIEW PRODUCT ONLINE](#)