


## Kobe 26W Three Circuit Tracklight

KOBE3026.BB40.M

Absolute Luminous Flux 26W (670mA) / 2437lm Beam 36° (M)

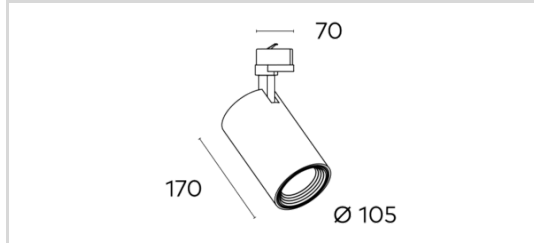

Diameter	Ø105mm
Length	170mm
Weight	1.26kg
Finish	Textured Black
Colour Temp	4000K
CRI	92+ (R9: >50)
Class	Class I
Beam Angle	36° (M)
Material	Powder Coated Aluminium
UGR	<13
IP Rating	IP20
Efficacy	Up to 92lm/W
Colour Deviation	SDCM ≤2
Lifetime	>55,000h L80B10
Control Gear	Built-in Phase-Cut Dim
Track Mount	MX3 (3C)
Adjustability	90° Tilt   350° Rotation
Warranty	5 Years

### Electronic Control Gear

Built-in UNIOS PC Driver STD-IPC

Dimensions: Var.

### Downloads

General Specifications	
Product Images	
IES Files	
Installation Instructions	
Revit Family	
Sketchup Objects	
ArchiCAD Library	

### Features

- Distinguished by a striking contrasting design, the Kobe Track Light Series will add an elegant touch to any design application
- This track light series is available in four meticulously selected finishes and an array of customisable configurations to complement any design application
- Class-leading longevity with new generation LED chips, allowing for a lifetime of over 100,000hr (L70)
- Highly customisable track spot system with different beams angles and lenses

### Light Distribution



### Cone Diagram

(m)	Ø (m)	E(0°)(lx)
2.0	1.73	889
4.0	3.46	222
6.0	5.19	99

### Luminaire Notes

For other Casambi Bluetooth options, please refer to [unios.com/smartcontrols](https://unios.com/smartcontrols)  
For any custom requests, please specify in the notes section.

### Ordering Code

Stocked Configuration (subject to availability) ●

KOBE	3026	BB	40	M	-			-	
PRODUCT	TRACK MOUNT/POWER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES		CONTROL GEAR	

### Contact Information

Name  
Company

Email  
Phone



[VIEW PRODUCT ONLINE](#)