


Ovo Wall Light

OVOW002.TB30.F

Absolute Luminous Flux 2W (700mA) / 95lm Beam 120° (F)

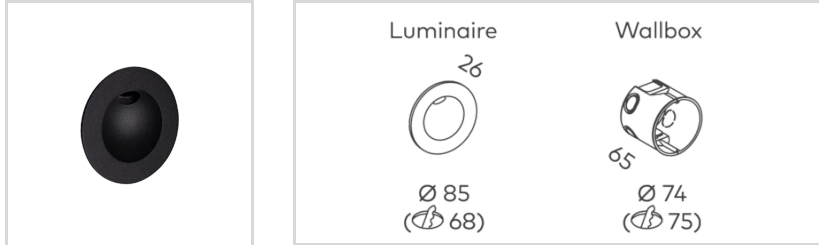

Diameter	Ø85mm
Finish	UV Textured Black
Colour Temp	3000K
Class	Class III
Beam Angle	120° (F)
Material	Powder Coated Aluminium, PVC Wallbox
IP Rating	IP65
Wiring	Wired in Series
Warranty	3 Years
CRI	80+ (R9: >0)
Efficacy	Up to 30lm/W
Colour Deviation	SDCM ≤ 3
Lifetime	>60,000h L80B10

Electronic Control Gear

Remote UNIOS 700mA 3-4.7VDC IP65 Non-Dim CC070001

Dimensions: 126x46x26mm

Downloads

General Specifications	
Product Images	
IES Files	
Installation Instructions	
Revit Family	
Sketchup Objects	
ArchiCAD Library	

Features

- Emphasise the architectural elements of your home with the lightly textured Ovo Wall Light
- Striking circular concave design
- Suitable for indicator/step lighting applications
- Complete with tension wing clips (suitable with or without wallbox installations)

Light Distribution



Luminaire Notes

Dimmable Option requires multiple luminaires on single remote control gear. Please contact sales@unios.com for more options. For other Casambi Bluetooth options, please refer to unios.com/smartcontrols. For any custom requests, please specify in the notes section.

Ordering Code

Stocked Configuration (subject to availability) ●

OVOW	0002	TB	30	F	-				-	
PRODUCT	POWER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES		CONTROL GEAR		

Contact Information

Name _____ Email _____
Company _____ Phone _____



[VIEW PRODUCT ONLINE](#)