


## Titanium 400mm Surface Mounted Starlight

TIST0043.TB27.W-TSSM0400.TB

**Absolute Luminous Flux** 5W (150mA) / Up to 468lm      **Beam** 50° (W)

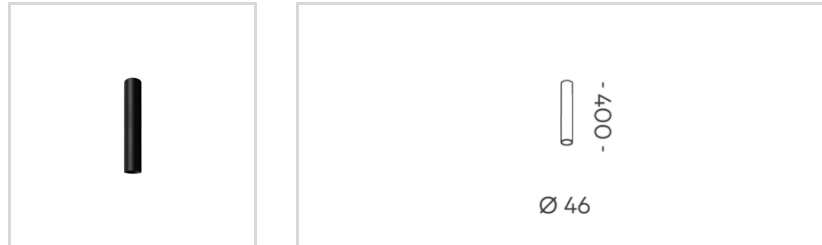

<b>Product Type</b>	Surface Mounted
<b>Diameter</b>	Ø46mm
<b>Height</b>	400mm
<b>Finish</b>	Textured Black
<b>Colour Temp</b>	2700K
<b>Class</b>	Class I
<b>Beam Angle</b>	50° (W)
<b>Material</b>	Powder Coated Aluminium
<b>IP Rating</b>	IP20
<b>UGR</b>	<13
<b>Warranty</b>	5 Years
<b>CRI</b>	92+ (R9: >50)
<b>Efficacy</b>	Up to 82lm/W
<b>Colour Deviation</b>	SDCM ≤ 2
<b>Lifetime</b>	>55,000h L80B10

### Electronic Control Gear

Built-in UNIOS PC Driver  
STD-IPC

Dimensions: Var.


### Downloads

- General Specifications
- Product Images
- IES Files
- Installation Instructions
- Revit Family
- Sketchup Objects
- ArchCAD Library

### Features

- Establishing new heights and shifting cord lengths, these minimal canisters offer complete design flexibility.
- The design and engineering behind the Titanium Starlight is aimed at providing optimum visual comfort.
- The super low-glare design blocks the light source from direct line of sight, creating a soft and comfortable spread of light.
- Multiple versions of the Titanium Starlight in surface mounted or suspended options ensures various applications can be created from this one luminaire family.

### Light Distribution



### Luminaire Notes

For Casambi Bluetooth options, please refer to [unios.com/smartcontrols](http://unios.com/smartcontrols)  
For any custom requests, please specify in the notes section.

### Ordering Code

Stocked Configuration (subject to availability) ●

TIST	0043	TB	27	W	-	TSSM0400.TB		-	
PRODUCT	DIAMETER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES			CONTROL GEAR

### Contact Information

Name \_\_\_\_\_ Email \_\_\_\_\_  
Company \_\_\_\_\_ Phone \_\_\_\_\_



[VIEW PRODUCT ONLINE](#)