


## Titanium 800mm Surface Mounted Starlight

TIST0043.TB40.W-TSSM0800.TB

Absolute Luminous Flux 5W (150mA) / 476lm Beam 50° (W)

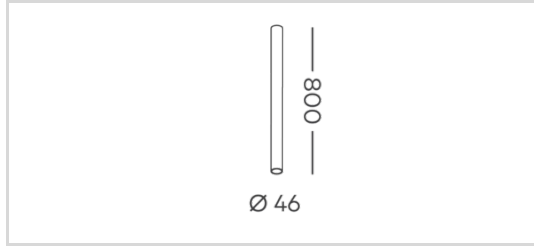

Product Type	Surface Mounted
Diameter	Ø46mm
Height	800mm
Finish	Textured Black
Colour Temp	4000K
Class	Class I
Beam Angle	50° (W)
Material	Powder Coated Aluminium
IP Rating	IP20
UGR	<13
Warranty	5 Years
CRI	92+ (R9: >50)
Efficacy	Up to 82lm/W
Colour Deviation	SDCM ≤ 2
Lifetime	>55,000h L80B10

### Electronic Control Gear

Built-in UNIOS PC Driver STD-IPC

Dimensions: Var.


### Downloads

General Specifications	
Product Images	
IES Files	
Installation Instructions	
Revit Family	
Sketchup Objects	
ArchCAD Library	

### Features

- Establishing new heights and shifting cord lengths, these minimal canisters offer complete design flexibility.
- The design and engineering behind the Titanium Starlight is aimed at providing optimum visual comfort.
- The super low-glare design blocks the light source from direct line of sight, creating a soft and comfortable spread of light.
- Multiple versions of the Titanium Starlight in surface mounted or suspended options ensures various applications can be created from this one luminaire family.

### Light Distribution



### Luminaire Notes

For Casambi Bluetooth options, please refer to [unios.com/smartcontrols](http://unios.com/smartcontrols)  
For any custom requests, please specify in the notes section.

### Ordering Code

Stocked Configuration (subject to availability) ●

TIST	0043	TB	40	W	-	TSSM0800.TB		-	
PRODUCT	DIAMETER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES			CONTROL GEAR

### Contact Information

Name \_\_\_\_\_ Email \_\_\_\_\_  
Company \_\_\_\_\_ Phone \_\_\_\_\_



[VIEW PRODUCT ONLINE](#)