


## Titanium G2 Small Downlight

TITA0084.TW40.W-FP030001

Absolute Luminous Flux 11W (300mA) / 944lm Beam 60° (W)

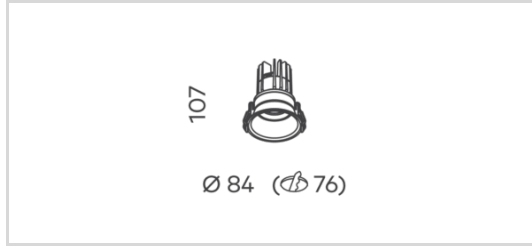

Diameter	Ø84mm
Height	106mm
Finish	Textured White
Colour Temp	4000K
Class	Class II
Beam Angle	60° (W)
UGR	<16
Material	Powder Coated Aluminium
IP Rating	IP44 (Room Side)
Warranty	5 Years
CRI	92+ (R9: >50)
Efficacy	Up to 87lm/W
Colour Deviation	SDCM≤2
Lifetime	>55,000h L90B10
Adjustability	25° Tilt
COI Compatibility	Pass
Classification	IC-4

### Electronic Control Gear

Remote G2 300mA Flicker-Free IP20 PC Driver  
FP030001

Dimensions: 101x51x23mm


### Downloads

- General Specifications
- Product Images
- IES Files
- Installation Instructions
- Revit Family
- Sketchup Objects
- ArchicAD Library

### Features

- Trimless Design. The classic trimless, concave design blends effortlessly into ceilings of any project
- Adjustable Tilt. The Titanium G2 Downlight can be tilted up to 25° for optimum flexibility in application
- Clear Lens. The new clear lens showcases the redesigned faceted reflector in its best light
- IC-4 Rated. The precisely designed heatsink achieves an IC-4 rating, for maximum heat dissipation

### Light Distribution



### Cone Diagram

(m)	Ø (m)	E(0°)(lx)
2.0	2.11	299
4.0	4.22	75
6.0	6.33	33

### Luminaire Notes

For other Casambi Bluetooth options, please refer to [unios.com/smartcontrols](https://unios.com/smartcontrols)  
For any custom requests, please specify in the notes section.

### Ordering Code

Stocked Configuration (subject to availability) ●

TITA	0084	TW	40	W	-			-	FP030001
PRODUCT	DIAMETER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES			CONTROL GEAR

### Contact Information

Name \_\_\_\_\_ Email \_\_\_\_\_  
Company \_\_\_\_\_ Phone \_\_\_\_\_



[VIEW PRODUCT ONLINE](#)