


Titanium G2 Medium Downlight

TITA0100.TB40.W-FP035001

Absolute Luminous Flux 13W (350mA) / 1148lm Beam 60° (W)

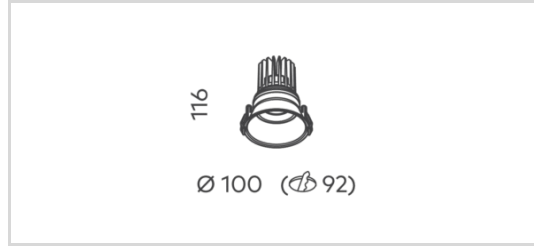

Diameter	Ø100mm
Height	115mm
Finish	Textured Black
Colour Temp	4000K
Class	Class II
Beam Angle	60° (W)
UGR	<16
Material	Powder Coated Aluminium
IP Rating	IP44 (Room Side)
Warranty	5 Years
CRI	92+ (R9: >50)
Efficacy	Up to 87lm/W
Colour Deviation	SDCM≤2
Lifetime	>55,000h L90B10
Adjustability	25° Tilt
COI Compatibility	Pass
Classification	IC-4

Electronic Control Gear

Remote G2 350mA Flicker-Free IP20 PC Driver
FP035001

Dimensions: 101x51x23mm


Downloads

- General Specifications
- Product Images
- IES Files
- Installation Instructions
- Revit Family
- Sketchup Objects
- ArchicAD Library


Features

- Trimless Design. The classic trimless, concave design blends effortlessly into ceilings of any project
- Adjustable Tilt. The Titanium G2 Downlight can be tilted up to 25° for optimum flexibility in application
- Clear Lens. The new clear lens showcases the redesigned faceted reflector in its best light
- IC-4 Rated. The precisely designed heatsink achieves an IC-4 rating, for maximum heat dissipation

Light Distribution



Cone Diagram



Luminaire Notes

For other Casambi Bluetooth options, please refer to unios.com/smartcontrols
For any custom requests, please specify in the notes section.

Ordering Code

Stocked Configuration (subject to availability)

TITA	0100	TB	40	W	-			-	FP035001
PRODUCT	DIAMETER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES			CONTROL GEAR

Contact Information

Name
Company

Email
Phone



[VIEW PRODUCT ONLINE](#)