
Athena G2 Fixed One Wall Light, Textured White, 3000K

ATF10018.TW30.M

Availability: Standard (This item is generally stocked, please check with your Unios distributor)



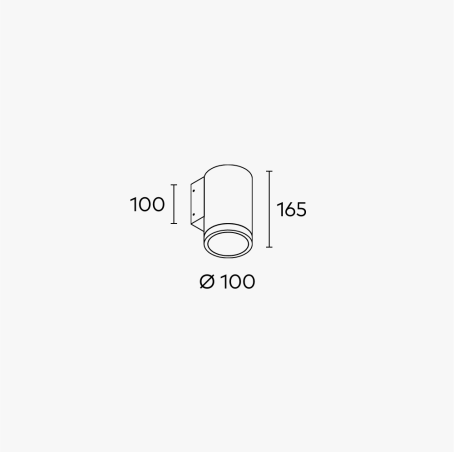

Downloads

- BIM Object - Sketchup
- BIM Object - Revit
- Installation Instructions

Key Product Info

- 18W (500mA)
- 3000K (2078lm)
- Textured White
- 36°


Driver

Name	Unios G2 500mA Flicker-Free Phase-Cut Driver
Product Code	FP050002
Driver Location	Built-In
Control Type	Phase-cut dimmable
Measurements (LxWxH)	55x55x25mm
Current output maximum	500mA


Performance Specifications

Lumens	2078lm
IK Rating	IK10
IP Rating	IP66
CRI	92
Efficacy	Up to 115.44lm/W
Lifetime	>55,000h L90B10
LED Type	COB
SDCM	≤2
COI Compliance	N/A
Warranty	5 Years

Photometrics



Cone Diagram



Design Specifications

Material	Powder Coated Aluminium
Height	165mm
Diameter	ø100mm
Weight	1600g
Family Name	Athena G2 Series

Installation Specifications

Remote Mount	No
Class Rating	Class I

Notes

Upward Waste Light Ratio: 0%

sales@unios.com / unios.com

Exported: 10.11.26 / Product design and technical data may be subject to change.
© Unios Pty Ltd 2021

Configure online