


Cuadro Large Wall Light

CUAD0008.TG30.F

Absolute Luminous Flux 8W (24VDC) / 363lm Beam 90° (F)

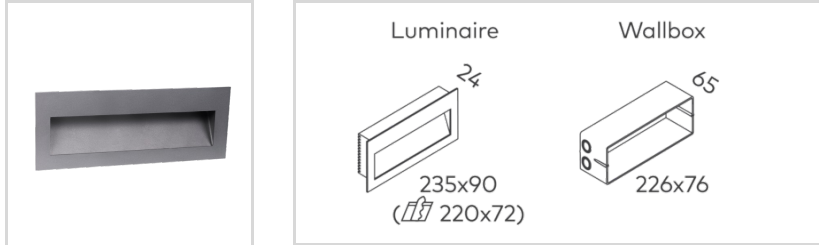

LxW	235x90mm
Cutout	220x72mm
Wallbox Cutout	226x76mm
Height	24mm
Finish	Textured Grey
Colour Temp	3000K
Class	Class III
Beam Angle	90° (F)
Material	Powder Coated Aluminium, PVC Wallbox
IP Rating	IP65
Wiring	Wired in Parallel
Warranty	3 Years
CRI	80+ (R9: >0)
Efficacy	Up to 55lm/W
Colour Deviation	SDCM ≤ 3
Lifetime	>54,000h L70B10

Electronic Control Gear

24VDC Control Gear Required
24VDCREQUIRED

Dimensions: Var.

Downloads

General Specifications	
Product Images	
IES Files	
Installation Instructions	
Revit Family	
Sketchup Objects	
ArchicAD Library	

Features

- The Cuadro Wall Light's wide beam allows for the installation of fewer luminaires compared to traditional pathway lights.
- Creating a soft, indirect light with very low glare, this luminaire remains subtle and unobtrusive.
- As a recessed wall luminaire, the Cuadro Wall Light isn't limited only to being utilised as a fixed down pathway luminaire.
- It can also be installed high on walls fixed up as an alternative to traditional general lighting.

Light Distribution



Luminaire Notes

24VDC Control gear required. Go to 24V DC control gear product to specify.
For other Casambi Bluetooth options, please refer to unios.com/smartcontrols
For any custom requests, please specify in the notes section.

Ordering Code

Stocked Configuration (subject to availability)

CUAD	0008	TG	30	F	-			-	
PRODUCT	POWER	FINISH	COLOUR TEMP	BEAM		ACCESSORIES			CONTROL GEAR

Contact Information

Name _____ Email _____
Company _____ Phone _____



[VIEW PRODUCT ONLINE](#)